



## Topas

### Fluorescent lights



**Topas** luminaires are the most recommended lighting solution whenever soft lights are requested. They have an extremely consistent light distribution over a large beam angle. Depending on the used fluorescent tubes, they can be mixed with halogen or daylight spot lights. Because of the high light-output efficiency, they generate very little heat.

The newly developed electronics allow a flicker-free operation with a linear dimming range of 10 to 100%. The dimming can be controlled manually by a local dimmer or any DMX-capable lighting control device.

The design of the housing and the arrangement of the tubes guarantee best cooling conditions, a very important premise for constant color temperature of the light.


The selected DMX channel is shown on a big display. Every luminaire is equipped with mains IN and OUT and DMX IN and OUT sockets. This allows a daisy chain of several luminaires.

A large range of accessories ensures easy and flexible integration into any studio.




**SYSTEC S.A.**

*advance by innovation*

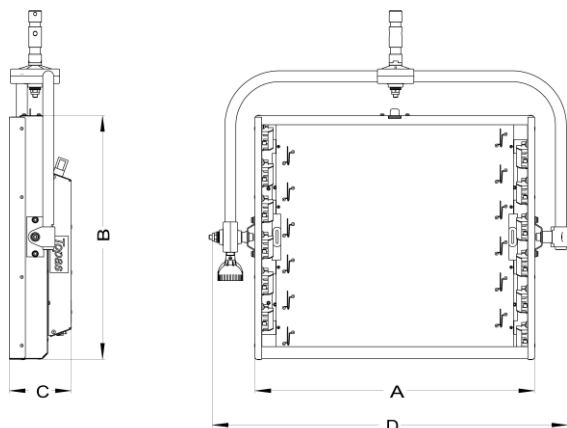

### Technical Specification

Power supply	230V / 50-60Hz
Mains IN	PowerCon
Mains OUT for daisy chain	PowerCon
Mains fuse	10A
Mains cable	2m with Schuko plug
Dimming range	10 – 100%
Control	DMX512 / 0 – 10V (option T-DIM2)
DMX IN	XLR 5p
DMX OUT for daisy chain	XLR 5p
Tube socket	2G11
Operating temperature	0 to +40°C
Air humidity	0 – 95%

### Product Versions

	Topas 110	Topas 220	Topas 330	Topas 440	Topas 660					
<b>Versions / Order Code</b>										
Standard (manual yoke)	T113T	T223T	T333T	T443T	T663T					
Studio (pole operated)	T113TM	T223TM	T333TM	T443TM	T663TM					
Location (ball head)	T113TL	T223TL	T333TL	T443TL	T663TL					
<b>Weight</b>										
Standard	5,0kg	6,1kg	7,7kg	9,2kg	12,2kg					
Studio	6,1kg	7,2kg	8,8kg	10,3kg	13,3kg					
Location	5,0kg	6,1kg	7,7kg	9,2kg	12,2kg					
<b>Number of tubes (55W)</b>	2	4	6	8	12					
<b>Dimensions</b>										
A	615mm	615mm	615mm	615mm	615mm					
B	150mm	217mm	292mm	372mm	527mm					
C	133mm	133mm	133mm	133mm	133mm					
D	730mm	730mm	730mm	730mm	730mm					
<b>Photometric data (lux)</b>	with barndoor		with barndoor		with barndoor		with barndoor		with barndoor	
Distance	<b>black</b>	<b>reflective</b>	<b>black</b>	<b>reflective</b>	<b>black</b>	<b>reflective</b>	<b>black</b>	<b>reflective</b>	<b>black</b>	<b>reflective</b>
1m	1760	2370	3300	4370	6012	7816	-	-	-	-
2m	510	690	905	1220	1275	1715	1640	2210	2580	3480
3m	255	305	465	620	675	885	940	1270	1315	1770
4m	-	-	280	375	410	538	540	730	795	1070
5m	-	-	-	-	195	256	370	500	545	730

### Product Accessories

	Topas 110	Topas 220	Topas 330	Topas 440	Topas 660
<b>Gelframe</b>	TFR110	TFR220	TFR330	TFR440	TFR660
<b>4-leaf barndoor black</b>	TDB110	TDB220	TDB330	TDB440	TDB660
<b>4-leaf barndoor reflective</b>	TDR110	TDR220	TDR330	TDR440	TDR660
<b>Egg crate</b>	TET110	TET220	TET330	TET440	TET660
<b>Ball head</b>	TBH16	TBH28	TBH28	TBH28	TBH28
<b>Manual yoke</b>	TMS123	TMS123	TMS123	TMS46	TMS46
<b>Pole operated yoke</b>	TPO123	TPO123	TPO123	TPO46	TPO46
<b>Tube 3200K (tungsten)</b>			L5532C		
<b>Tube 5600K (daylight)</b>			L5556C		
<b>Local dimmer</b>			T-DIM2		
<b>PowerCon connecting cable 2,5m</b>			PCON-25		
<b>PowerCon connecting cable 5m</b>			PCON-50		
<b>DMX connecting cable 2,5m</b>			DMX-25		
<b>DMX connecting cable 5m</b>			DMX-50		



Germany-Munich Office:

